


## FLANGE COM PESCOÇO (WELDING NECK) - ANSI B 16.5 - 150 LBS

F301

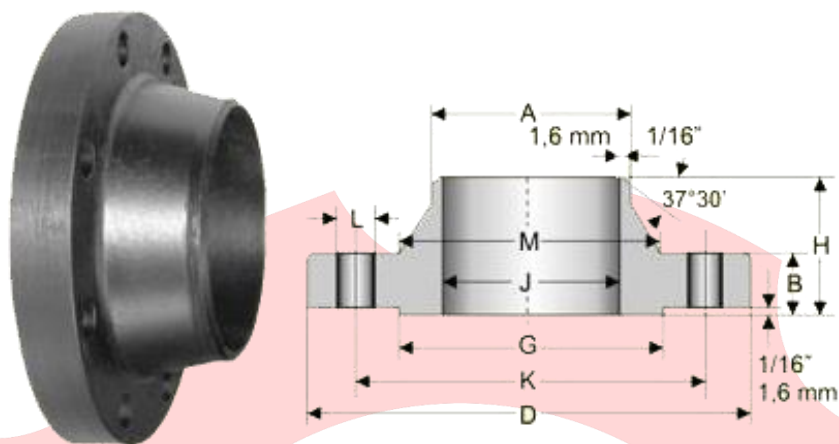

| DN<br>(pol.) | REF KILFLEX      | Nº de<br>Furos | A<br>(mm) | B<br>(mm) | D<br>(mm) | G<br>(mm) | H<br>(mm) | J<br>(mm)                       | K<br>(mm) | L<br>(mm) | M<br>(mm) | Peso<br>Aprox.<br>(kg) |
|--------------|------------------|----------------|-----------|-----------|-----------|-----------|-----------|---------------------------------|-----------|-----------|-----------|------------------------|
| 1/2"         | 10-I-0-153-1/2   | 4              | 21,3      | 11,1      | 88,9      | 34,9      | 47,6      | 15,7                            | 60,3      | 15,9      | 30,2      | 0,9                    |
| 3/4"         | 10-I-0-153-3/4   | 4              | 26,7      | 12,7      | 98,4      | 42,9      | 52,4      | 20,8                            | 69,8      | 15,9      | 38,1      | 0,9                    |
| 1"           | 10-I-0-153-1     | 4              | 33,5      | 14,3      | 108,0     | 50,8      | 55,6      | 26,7                            | 79,4      | 15,9      | 49,2      | 1,4                    |
| 1.1/4"       | 10-I-0-153-1.1/4 | 4              | 42,2      | 15,9      | 117,0     | 63,5      | 57,2      | 35,1                            | 88,9      | 15,9      | 58,7      | 1,4                    |
| 1.1/2"       | 10-I-0-153-1.1/2 | 4              | 48,3      | 17,5      | 127,0     | 73,0      | 61,9      | 40,9                            | 98,4      | 15,9      | 65,1      | 1,8                    |
| 2"           | 10-I-0-153-2     | 4              | 60,5      | 19,0      | 152,0     | 92,1      | 63,5      | 52,6                            | 121,0     | 19,0      | 77,8      | 2,7                    |
| 2.1/2"       | 10-I-0-153-2.1/2 | 4              | 73,2      | 22,2      | 178,0     | 104,8     | 69,8      | 62,7                            | 140,0     | 19,0      | 90,5      | 3,6                    |
| 3"           | 10-I-0-153-3     | 4              | 88,9      | 23,8      | 190,0     | 127,0     | 69,8      | 78,0                            | 152,0     | 19,0      | 108,0     | 4,5                    |
| 3.1/2"       | 10-I-0-153-3.1/2 | 8              | 102,0     | 23,8      | 216,0     | 140,0     | 71,4      | 90,2                            | 178,0     | 19,0      | 122,0     | 5,4                    |
| 4"           | 10-I-0-153-4     | 8              | 114,0     | 23,8      | 229,0     | 157,0     | 76,2      | 102,0                           | 190,0     | 19,0      | 135,0     | 6,8                    |
| 5"           | 10-I-0-153-5     | 8              | 141,0     | 23,8      | 254,0     | 186,0     | 88,9      | 128,0                           | 216,0     | 22,0      | 164,0     | 8,6                    |
| 6"           | 10-I-0-153-6     | 8              | 168,0     | 25,4      | 279,0     | 216,0     | 88,9      | 154,0                           | 241,0     | 22,0      | 192,0     | 10,9                   |
| 8"           | 10-I-0-153-8     | 8              | 219,0     | 28,6      | 343,0     | 270,0     | 102,0     | 203,0                           | 298,0     | 22,0      | 246,0     | 17,7                   |
| 10"          | 10-I-0-153-10    | 12             | 273,0     | 30,2      | 406,0     | 324,0     | 102,0     | 255,0                           | 362,0     | 25,4      | 305,0     | 23,6                   |
| 12"          | 10-I-0-153-12    | 12             | 324,0     | 31,8      | 483,0     | 381,0     | 114,0     | 305,0                           | 432,0     | 25,4      | 365,0     | 36,3                   |
| 14"          | 10-I-0-153-14    | 12             | 356,0     | 34,9      | 533,0     | 413,0     | 127,0     | 336,5                           | 476,0     | 28,6      | 400,0     | 50,0                   |
| 16"          | 10-I-0-153-16    | 16             | 406,0     | 36,5      | 597,0     | 470,0     | 127,0     | 387,0                           | 540,0     | 28,6      | 457,0     | 64,0                   |
| 18"          | 10-I-0-153-18    | 16             | 457,0     | 39,7      | 635,0     | 533,0     | 140,0     | 438,0                           | 578,0     | 31,8      | 505,0     | 68,0                   |
| 20"          | 10-I-0-153-20    | 20             | 508,0     | 42,9      | 698,0     | 584,0     | 144,0     | 489,0                           | 635,0     | 31,8      | 559,0     | 81,6                   |
| 22"          | 10-I-0-153-22    | 20             | 558,8     | 46,0      | 749,3     | 641,3     | 149,3     | 539,7                           | 692,1     | 34,9      | 616,0     | 102,0                  |
| 24"          | 10-I-0-153-24    | 20             | 610,0     | 47,6      | 813,0     | 692,0     | 152,0     | 590,5                           | 749,0     | 34,9      | 664,0     | 118,0                  |
| 26" (2)      | 10-I-0-153-26    | 24             | 660,0     | 50,8      | 869,9     | 742,9     | 127,0     | Especificações sob<br>encomenda | 806,4     | 34,9      | 723,9     | 136,0                  |
| 28" (2)      | 10-I-0-153-28    | 28             | 711,2     | 52,4      | 927,1     | 793,7     | 128,6     |                                 | 863,6     | 34,9      | 781,0     | 143,0                  |
| 30" (2)      | 10-I-0-153-30    | 28             | 762,0     | 54,0      | 984,2     | 857,2     | 130,2     |                                 | 914,4     | 34,9      | 831,8     | 163,0                  |
| 32" (2)      | 10-I-0-153-32    | 28             | 812,8     | 57,1      | 1060,4    | 908,0     | 133,3     |                                 | 977,9     | 41,3      | 889,0     | 197,0                  |
| 34" (2)      | 10-I-0-153-34    | 32             | 863,6     | 58,7      | 1111,2    | 958,8     | 134,9     |                                 | 1028,7    | 41,3      | 939,8     | 211,0                  |
| 36" (2)      | 10-I-0-153-36    | 32             | 914,4     | 60,3      | 1168,4    | 1022,3    | 136,5     |                                 | 1085,8    | 41,3      | 996,9     | 236,0                  |
| 42" (2)      | 10-I-0-153-42    | 36             | 1066,8    | 66,7      | 1346,2    | 1193,8    | 142,9     |                                 | 1257,3    | 41,3      | 1168,4    | 340,0                  |